

STAUFF Tube - Steel



STAUFF Tube - Stainless Steel



Germany

Walter Stauffenberg GmbH & Co. KG

Im Ehrenfeld 4
58791 Werdohl
Tel.: +49 2392 91 60
Fax: +49 2392 91 61 03
E-Mail: sales@stauff.com
www.stauff.com

Australia

STAUFF Corporation Pty Ltd

24-26 Doyle Avenue
Unanderra NSW 2526
Tel.: +61 2 4271 9000
Fax: +61 2 4271 9099
E-Mail: sales@stauff.com.au
www.stauff.com.au

New Zealand

STAUFF Corporation (NZ) Ltd.

Unit D, 103 Harris Road
East Tamaki, Auckland 2013
Tel.: +64 9 912 1530
Fax: +64 9 912 1531
E-Mail: sales@stauff.co.nz
www.stauff.co.nz

STAUFF products and services are globally available through wholly-owned subsidiaries and a tight network of authorised distributors and representatives in all major industrial regions of the world.

You can find detailed contact information on the back cover of this product catalogue or at www.stauff.com

Disclaimer: Unless otherwise stated, all data, figures, diagrams and measurements in this product catalogue are approximate values only. While every effort has been made to ensure the accuracy of these figures, diagrams and measurements they should only be used as general references and you should not rely on them for any technical or critical application. If you require precise measurements please contact us to discuss the individual product you are interested in prior to deciding to purchase it.

All customers are fully responsible for verifying the product(s) they purchase are suitable for their intended use or application (including that by third parties) prior to the time of purchase and we do not provide any warranties as to fitness additional to those implied by law. We do not take responsibility for any liability arising from incorrect product selection or application.

Publication of this product catalogue voids all offers and deals contained in previous editions.

Introduction**2 - 3****STAUFF Tube - Steel****4 - 7****STAUFF Tube - Stainless Steel****8 - 13**

For more than 50 years, the companies of STAUFF Group have been developing, manufacturing and distributing pipework equipment and hydraulic components for mechanical and plant engineering and for service and industrial maintenance.

In addition to mobile and industrial hydraulic machinery, typical applications also include commercial and special purpose vehicles, rail transportation and energy technology. Likewise, STAUFF products are used in marine, oil and gas applications and in the process, food and chemical industries.

The overall range currently includes about 40000 standard products as well as numerous special and system solutions according to customer's specifications or based on our in-house development.

All STAUFF products undergo relevant testing in accordance with international regulations and are governed by the high standards of the in-house quality management system. Furthermore, many items have received certifications and approvals from various international institutes, organisations and authorities who have independently confirmed the quality and performance of the products.


Wholly-owned manufacturing, sales and service facilities in 18 countries and a tight global network of authorised distribution partner ensure high presence and service paired with a maximum of availability.



Lloyd's Register
LRQA

Quality Management – ISO 9001:2015
Environmental Management – ISO 14001:2015
Safety Management OHSAS – 18001:2007

STAUFF LINE Components

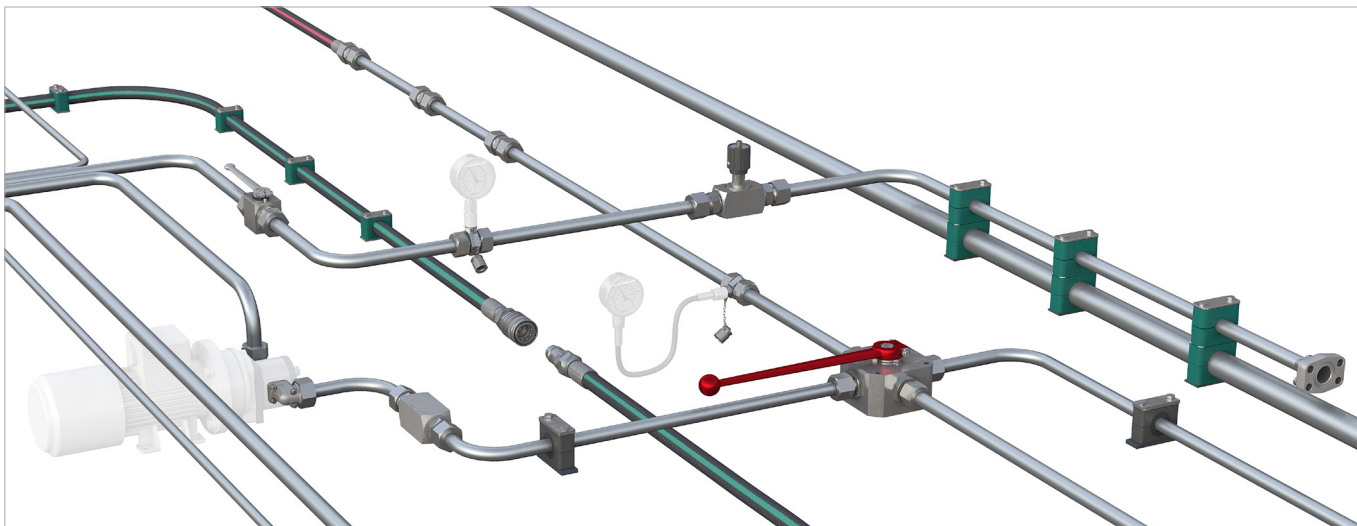

With the seven dedicated **STAUFF Line** product groups

- **STAUFF Clamps**
- **STAUFF Connect**
- **STAUFF Flanges**
- **STAUFF Hose Connectors**
- **STAUFF Quick Release Couplings**
- **STAUFF Valves**
- **STAUFF Test**

from own, in-house development and manufacturing, the companies of the STAUFF Group provide a comprehensive range of components for fastening and connecting pipes, tubes and hoses for mobile and industrial hydraulic applications and many other industries.

The portfolio is completed by components for shutting-off, regulating, throttling and measuring fluid media.

In order to perfectly match each other, STAUFF Line products are designed and offered on a high, uniform level of quality. A large proportion of the range made from steel comes as standard with the premium STAUFF Zinc/Nickel surface coating, which is also optionally available for many of the other components.

This coating offers the most reliable surface protection far beyond the previous market standards – even after transport, handling and assembly of the components – and meets all current legal requirements.


If desired, Original Equipment Manufacturers can be supported with value-added services, from **technical consultation to pre-assembly, assembly and kitting** as well as **logistics services**:

- Support with the **selection of suitable standard components** and ordering options; provision of **customised solutions** according to customer's specifications or based on our in-house development – from prototyping to large scale production
- **Analysis and optimization** of existing and design and developments of new systems aimed at increasing the efficiency and performance of machines and equipment and creating value for customers by reducing the total cost
- **Pre-assembly, assembly and kitting** of individual components to customer-specific system modules
- Individually coordinated **procurement solutions** (e.g. web shop and electronic data interchange) and **supply models** (e.g. from warehousing of customised components to Kanban logistics and just-in-time delivery of pre-fabricated system modules to the assembly lines of the customers) aimed at optimising material flows

STAUFF Tube is a local Australian and New Zealand standard market product and aligns with the seven dedicated **STAUFF Line** product groups.



STAUFF Tube

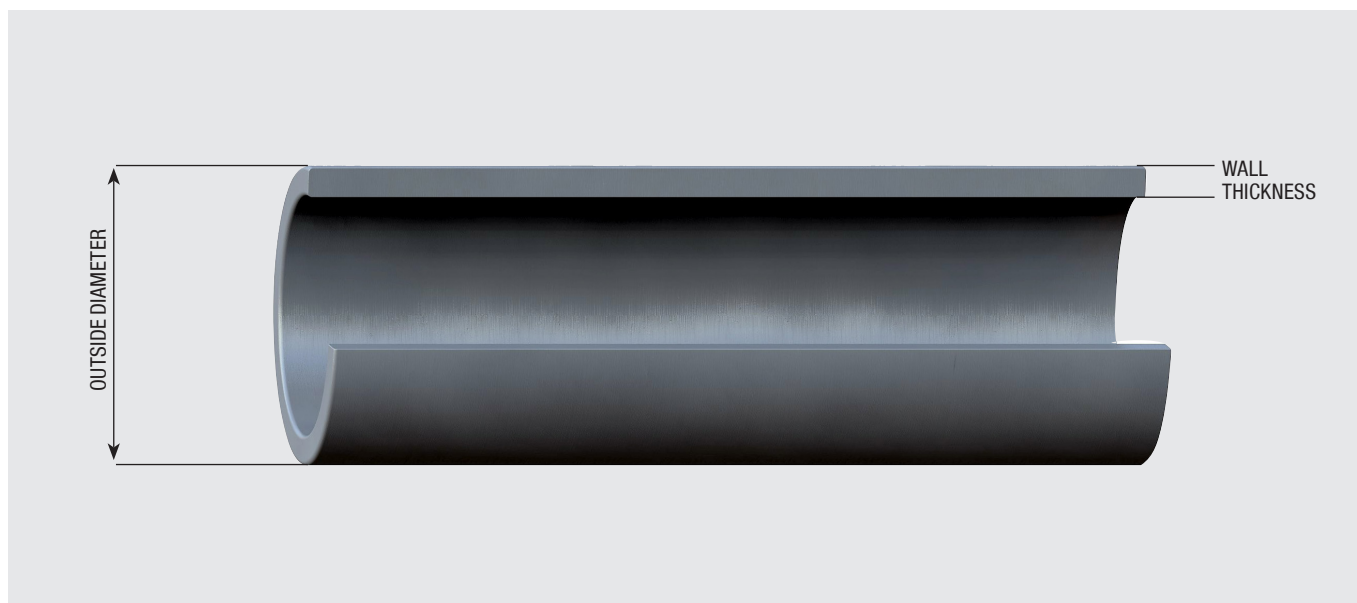

STAUFF supplies a range of precision hydraulic tubing in both metric and imperial sizes. The materials available are standard cold drawn, normalised, seamless (CDS) carbon steel, galvanised zinc plated, CDS carbon steel, and seamless annealed 316L stainless steel.

Steel tube is cleaned, normalised, free of scale, has a passivated zinc plated exterior with an oiled interior and capped ends. Stainless steel tube is cold drawn seamless, heat treated to anneal, and supplied with capped ends.

Tube is sold as 6 metre lengths.

Typical markets and applications


- Transport vehicles and equipment
- Construction mobile and stationary equipment
- Marine shipbuilding and offshore
- Heavy industrial plant and equipment
- Light industrial plant and equipment
- Process and instrumentation

Order Codes

The following designation structure is for Australian and New Zealand standard marketed range. Contact STAUFF for other options available on request.

TUM - 10x1.5 - L6 - W5/07 - S02 - AP					
①	②	③	④	⑤	⑥
① Model Code Tubing - OD Metric TUM Tubing - OD Imperial TUI	② Size The sizing is defined in the following format : (outside diameter in mm) x (wall thickness in mm) Metric Example: 10 x 1.5 Imperial Example: 6.35 x 0.91	③ Length Length 6000 mm (6 m) (standard) L6 Length Random * LR Length Custom - defined in mm * (LC3500 = Length 3.5 metres) LCxxxx * Conditions apply	④ Material Carbon steel galvanised E235 +N, thick layer passivated (ST37-4) W66/01 A4 Stainless steel 1.4401 / 1.4404 AISI 316 / AISI 316L (Mo 2.0% min) W5/07 A4 Stainless steel 1.4435 / 1.4436 AISI 316 / AISI 316L (Mo 2.5%min, Ni 12.5%min) W5/10	⑤ Standard EN 10305-4:2016 Steel tubes for precision applications. Seamless cold drawn tubes for hydraulic and pneumatic power systems. (CDS) S01 EN 10216-5:2013 Seamless steel tubes for pressure purposes. Stainless steel tubes S02	⑥ Surface Finish Annealed and pickled (for Stainless Steel materials only) AP Bright annealed (for Stainless Steel materials only) BA



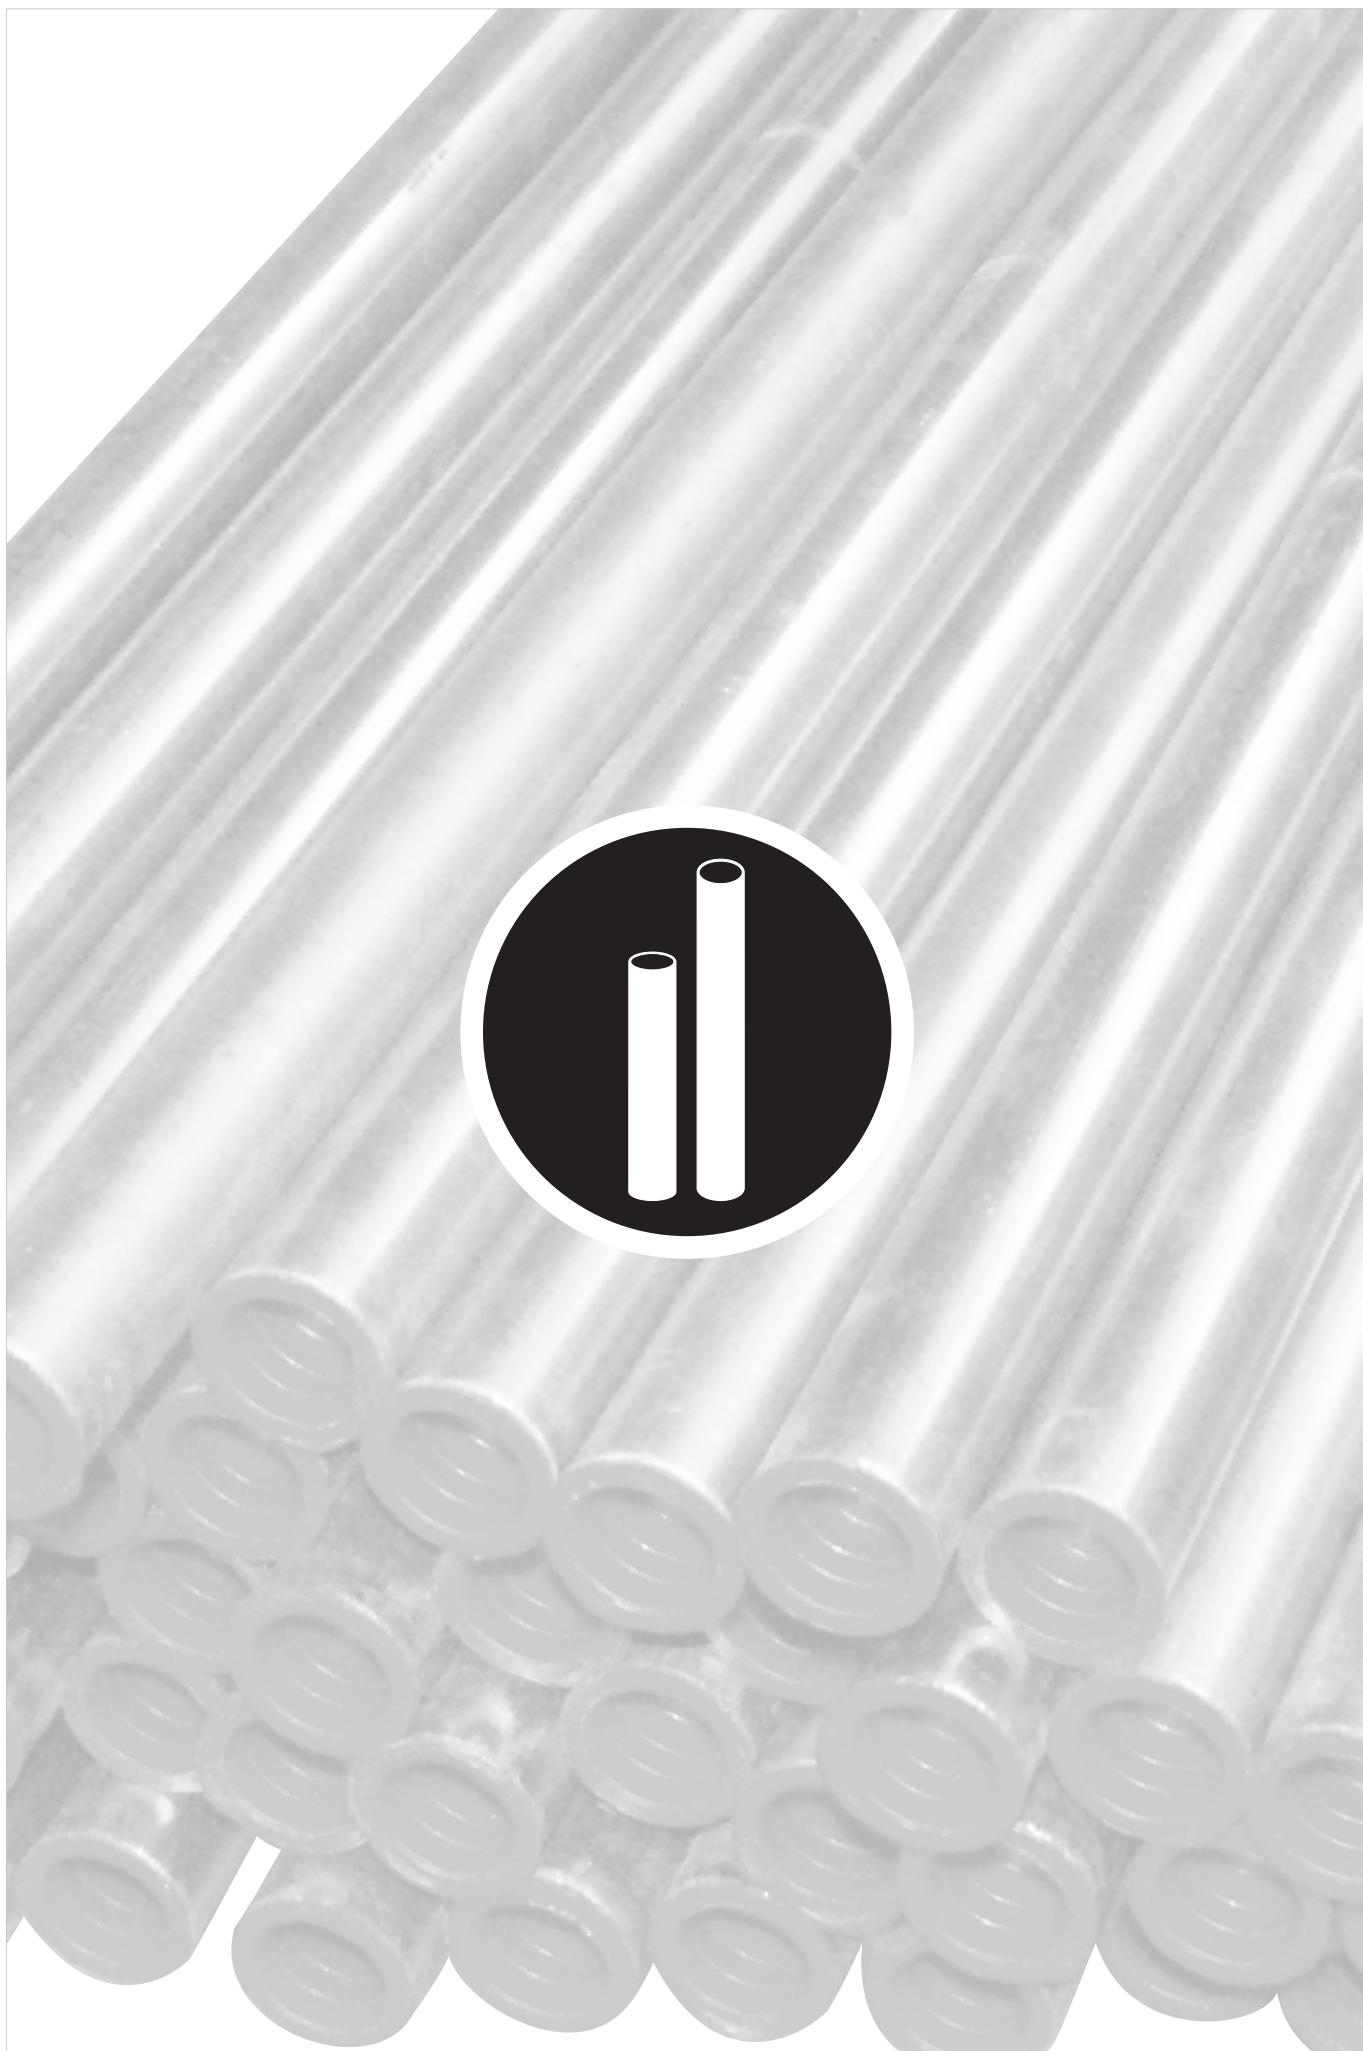



Metric Carbon Steel - Zinc Plated Tube
TUM-...-W66/01

6





Imperial Carbon Steel - Zinc Plated Tube
TUI-...-W66/01

7



Tube - Metric

Type TUM - Carbon Steel - Zinc Plated



Size	Tube OD (mm) D	Wall Thickness (mm) WT	Working Pressure (bar)	Burst Pressure (bar)	Weight (kg/m)	Item No.	Designation
6 x 1	6	1	444	1538	0.12	2030033122	TUM-6x1-L6-W66/01-S01
8 x 1	8	1	333	1120	0.17	2030033112	TUM-8x1-L6-W66/01-S01
8 x 1.5	8	1.5	499	1753	0.24	2030033123	TUM-8x1.5-L6-W66/01-S01
10 x 1	10	1	282	878	0.22	2030033124	TUM-10x1-L6-W66/01-S01
10 x 1.5	10	1.5	423	1369	0.31	2030033113	TUM-10x1.5-L6-W66/01-S01
12 x 1.5	12	1.5	352	1120	0.39	2030033114	TUM-12x1.5-L6-W66/01-S01
12 x 2	12	2	470	1538	0.49	2030033127	TUM-12x2-L6-W66/01-S01
14 x 2	14	2	403	1297	0.59	2030033128	TUM-14x2-L6-W66/01-S01
15 x 1.5	15	1.5	282	878	0.50	2030033129	TUM-15x1.5-L6-W66/01-S01
16 x 1.5	16	1.5	264	819	0.54	2030033131	TUM-16x1.5-L6-W66/01-S01
16 x 2	16	2	352	1120	0.69	2030033132	TUM-16x2-L6-W66/01-S01
16 x 2.5	16	2.5	440	1432	0.83	2030044183	TUM-16x2.5-L6-W66/01-S01
18 x 1.5	18	1.5	235	721	0.61	2030033134	TUM-18x1.5-L6-W66/01-S01
18 x 2	18	2	313	985	0.79	2030033115	TUM-18x2-L6-W66/01-S01
20 x 2	20	2	282	878	0.89	2030033137	TUM-20x2-L6-W66/01-S01
20 x 2.5	20	2.5	352	1120	1.08	2030033119	TUM-20x2.5-L6-W66/01-S01
22 x 2	22	2	256	792	0.99	2030033140	TUM-22x2-L6-W66/01-S01
25 x 2	25	2	226	690	1.13	2030033142	TUM-25x2-L6-W66/01-S01
25 x 2.5	25	2.5	282	878	1.39	2030033141	TUM-25x2.5-L6-W66/01-S01
25 x 3	25	3	338	1071	1.63	2030033143	TUM-25x3-L6-W66/01-S01
28 x 2	28	2	201	612	1.28	2030033145	TUM-28x2-L6-W66/01-S01
30 x 3	30	3	282	878	2.00	2030033148	TUM-30x3-L6-W66/01-S01
30 x 4	30	4	376	1202	2.56	2030033149	TUM-30x4-L6-W66/01-S01
35 x 2.5	35	2.5	201	612	2.00	6100060041	TUM-35x2.5-L6-W66/01-S01
35 x 3	35	3	242	743	2.37	2030033118	TUM-35x3-L6-W66/01-S01
38 x 4	38	4	297	928	3.35	2030033153	TUM-38x4-L6-W66/01-S01
38 x 5	38	5	371	1185	4.07	2030043517	TUM-38x5-L6-W66/01-S01
42 x 3	42	3	201	612	2.89	2030033155	TUM-42x3-L6-W66/01-S01

Standard length 6000 mm (6 m) sold as lengths

Weight unit is kilogram per metre

Specification – Steel Tube Zinc Plated

Material: E235

Tech. Std.: EN10305-4

Condition: Cold drawn seamless

Delivery condition: +N normalised
oiled and capped

Working pressures calculated for straight lengths @ <120° C

Zinc plated FeZn8C Chromium 6 Free

Order Codes



TUM-6x1*-L6*-W66/01*-S01

* Tubing - OD Metric	TUM	* Material	Carbon Steel	-W66/01
* Outside Tube Diameter - D (in mm)	-6	* Tube Standard	EN 10305-4:2016	-S01
* Wall Thickness - WT (in mm)	x1			
* Length	6 metre	-L6		

Please note: Tubing should be cut according to the relevant fitting manufacturer's assembly instructions.
For the cutting of tube, STAUFF recommends the use of a Cold saw or Band saw cutting device.

DISCLAIMER: Pressures are calculated for straight tube according to AS4041 for dynamic stress for the carbon steel tube and to AS4041 for static stress for the stainless steel tube and are given as a guide only. Bends may introduce wall thinning with consequent reduction in the allowable pressure. All critical applications should be subject to proving tests. No allowance has been made for corrosion in the calculations. Thin walled tubing will need support sleeves for secure "bite" type and "compression" type fitting assembly. Tube is generally available ex-stock, subject to prior sale. Minimum mill quantities may apply to certain sizes.



**Tube - Imperial
Type TUI - Carbon Steel - Zinc Plated**


Size	Tube OD (mm/inches) D		Wall Thickness (mm) WT	Working Pressure (bar)	Burst Pressure (bar)	Weight (kg/m)	Item No.	Designation
6.35 x 0.91	6.35	1/4	0.91	404	1302	0.12	2030050250	TUI-6.35x0.91-L6-W66/01-S01
9.53 x 1.22	9.53	3/8	1.22	361	1150	0.25	2030050252	TUI-9.53x1.22-L6-W66/01-S01
9.53 x 1.63	9.53	3/8	1.63	482	1583	0.32	2030001571	TUI-9.53x1.63-L6-W66/01-S01
12.7 x 1.22	12.7	1/2	1.22	271	841	0.35	2030050254	TUI-12.7x1.22-L6-W66/01-S01
12.7 x 1.63	12.7	1/2	1.63	362	1153	0.44	2030050283	TUI-12.7x1.63-L6-W66/01-S01
15.88 x 1.22	15.88	5/8	1.22	218	665	0.44	2030050256	TUI-15.88x1.22-L6-W66/01-S01
15.88 x 1.63	15.88	5/8	1.63	291	908	0.57	2030050258	TUI-15.88x1.63-L6-W66/01-S01
15.88 x 2.03	15.88	5/8	2.03	362	1154	0.69	2030050259	TUI-15.88x2.03-L6-W66/01-S01
19.05 x 1.63	19.05	3/4	1.63	241	742	0.70	2030050261	TUI-19.05x1.63-L6-W66/01-S01
19.05 x 2.03	19.05	3/4	2.03	300	941	0.85	2030044325	TUI-19.05x2.03-L6-W66/01-S01
19.05 x 2.64	19.05	3/4	2.64	391	1255	1.07	2030050264	TUI-19.05x2.64-L6-W66/01-S01
25.4 x 1.63	25.4	1	1.63	181	546	0.96	2030050265	TUI-25.4x1.63-L6-W66/01-S01
25.4 x 2.03	25.4	1	2.03	225	690	1.17	2030050266	TUI-25.4x2.03-L6-W66/01-S01
25.4 x 2.64	25.4	1	2.64	293	916	1.48	2030050268	TUI-25.4x2.64-L6-W66/01-S01
25.4 x 3.25	25.4	1	3.25	361	1149	1.78	2030050269	TUI-25.4x3.25-L6-W66/01-S01
31.75 x 1.63	31.75	1-1/4	1.63	144	431	1.21	2030050270	TUI-31.75x1.63-L6-W66/01-S01
31.75 x 2.03	31.75	1-1/4	2.03	180	543	1.49	2030050271	TUI-31.75x2.03-L6-W66/01-S01
31.75 x 2.64	31.75	1-1/4	2.64	240	740	1.90	2030050272	TUI-31.75x2.64-L6-W66/01-S01
31.75 x 3.25	31.75	1-1/4	3.25	288	899	2.28	2030050273	TUI-31.75x3.25-L6-W66/01-S01
38.1 x 3.25	38.1	1-1/2	3.25	288	899	2.79	2030050061	TUI-38.1x3.25-L6-W66/01-S01

Standard length 6000 mm (6 m) sold as lengths

Weight unit is kilogram per metre

Specification – Steel Tube Zinc Plated

Material: E235

Tech. Std.: EN10305-4

Condition: Cold drawn seamless

Delivery condition: +N normalised
oiled and capped

Working pressures calculated for straight lengths @ <120° C

Zinc plated FeZn8C Chromium 6 Free


Order Codes
***TUI*-6.35x0.91*-L6*-W66/01*-S01**

* Tubing - OD Imperial	TUI	* Material	Carbon Steel	-W66/01
* Outside Tube Diameter - D (in mm)	-6.35	* Tube Standard	EN 10305-4:2016	-S01
* Wall Thickness - WT (in mm)	x0.91			
* Length	6 metre			-L6

Please note: Tubing should be cut according to the relevant fitting manufacturer's assembly instructions.
For the cutting of tube, STAUFF recommends the use of a Cold saw or Band saw cutting device.

DISCLAIMER: Pressures are calculated for straight tube according to AS4041 for dynamic stress for the carbon steel tube and to AS4041 for static stress for the stainless steel tube and are given as a guide only. Bends may introduce wall thinning with consequent reduction in the allowable pressure. All critical applications should be subject to proving tests. No allowance has been made for corrosion in the calculations. Thin walled tubing will need support sleeves for secure "bite" type and "compression" type fitting assembly. Tube is generally available ex-stock, subject to prior sale. Minimum mill quantities may apply to certain sizes.



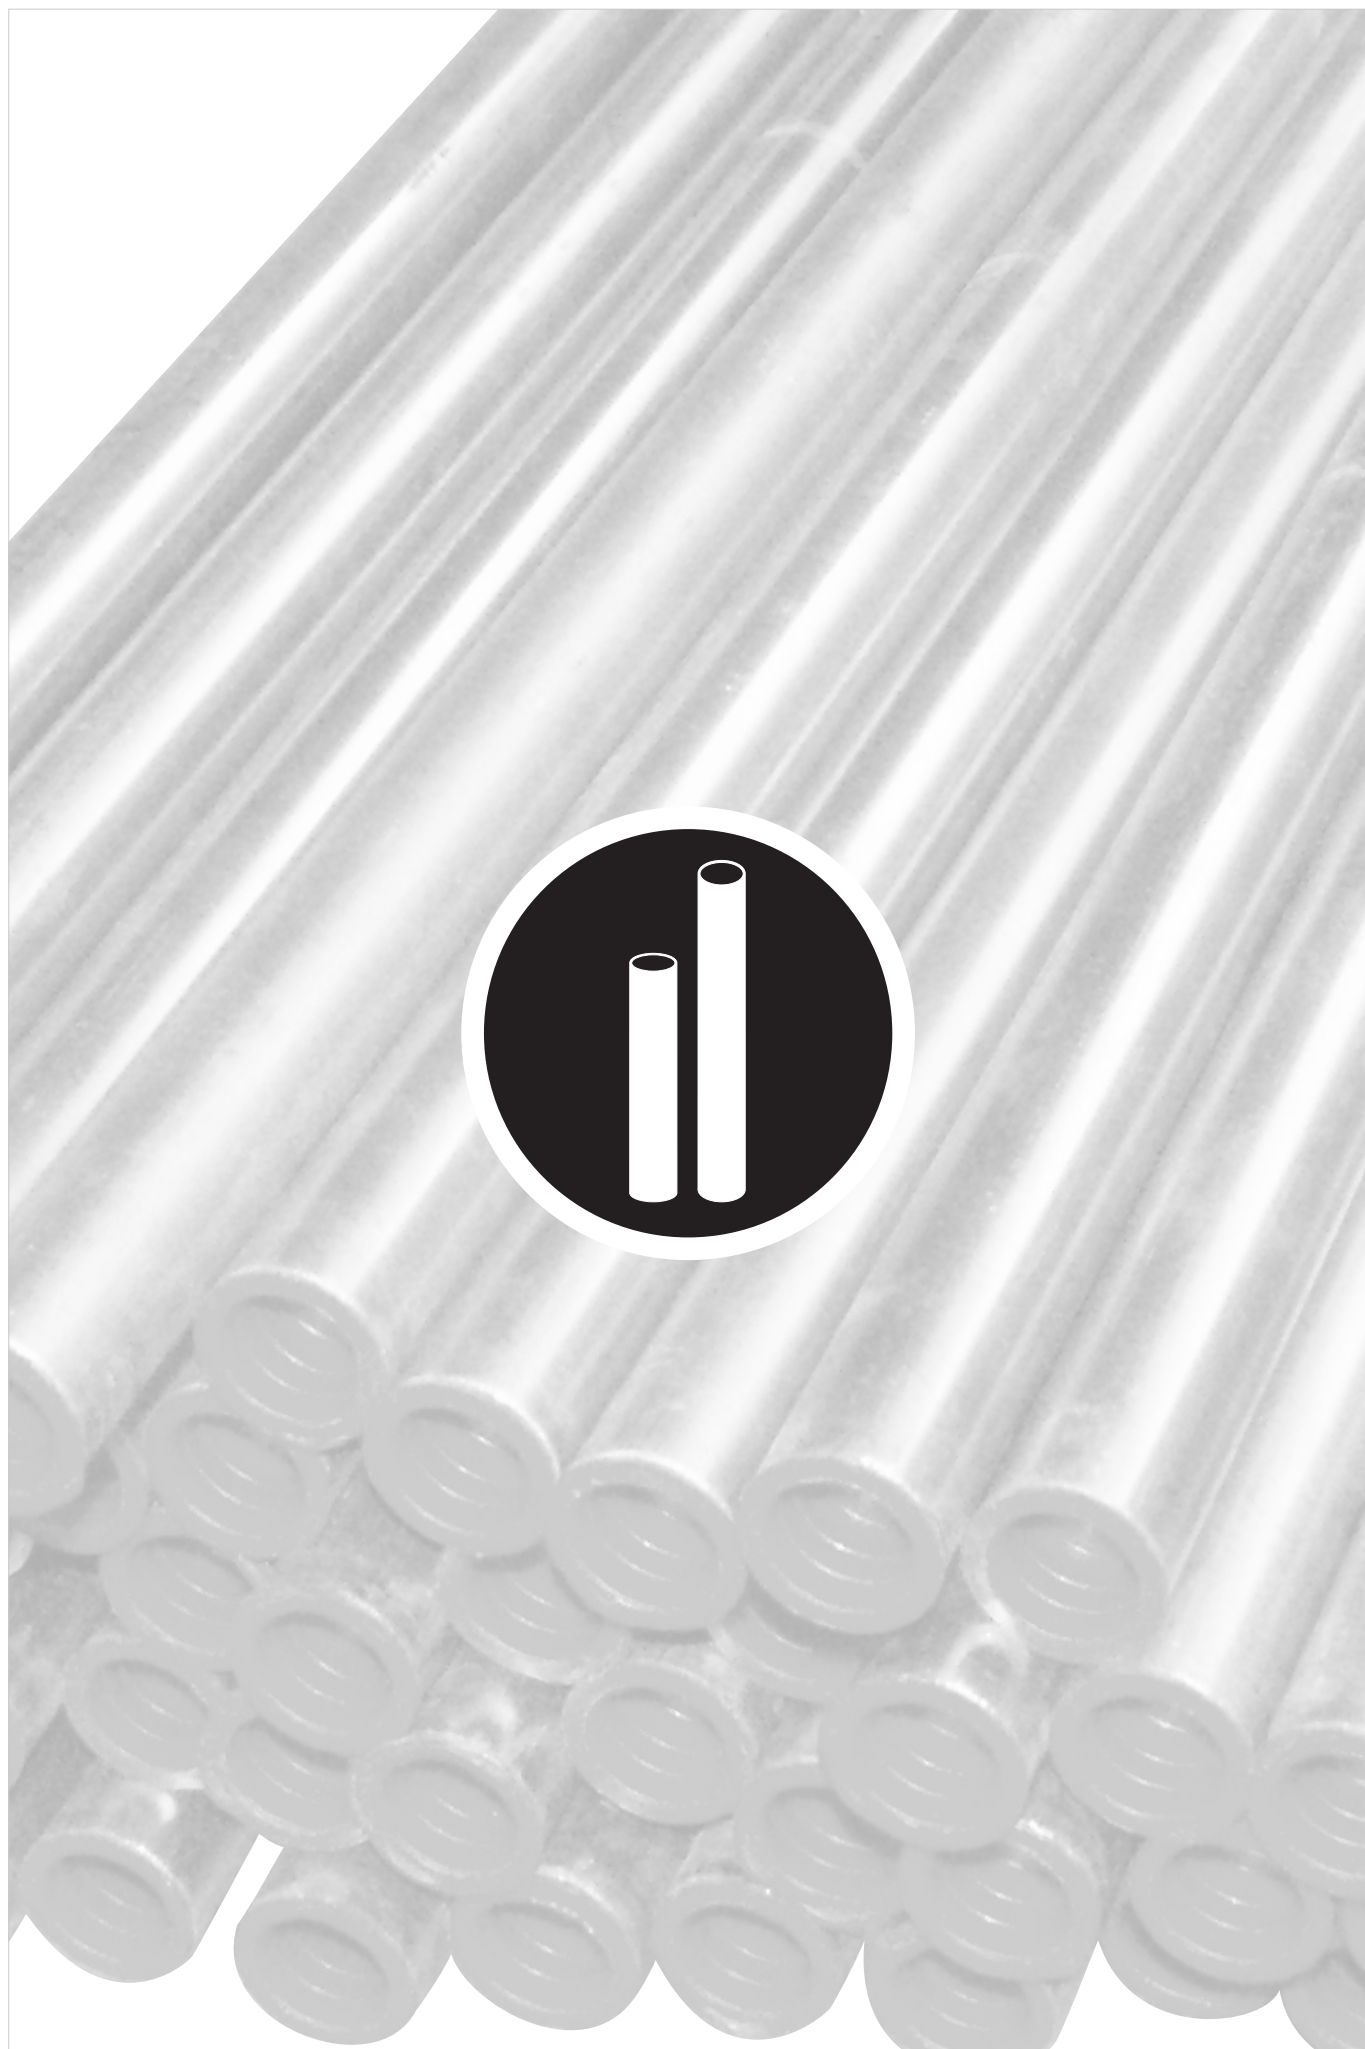



Metric Stainless Steel - Annealed & Pickled Tube
TUM-...-W5/07-AP

10




Imperial Stainless Steel - Annealed & Pickled Tube
TUI-...-W5/07-AP

11



Metric Stainless Steel - Bright Annealed Tube
TUM-...-W5/07-BA

12




Imperial Stainless Steel - Bright Annealed Tube
TUI-...-W5/07-BA

13



Tube - Metric

Type TUM - Stainless Steel - Annealed & Pickled



Size	Tube OD (mm) D	Wall Thickness (mm) WT	Working Pressure (bar)	Burst Pressure (bar)	Weight (kg/m)	Item No.	Designation
6 x 1	6	1	374	1923	0.13	6100053776	TUM-6x1-L6-W5/07-S02-AP
8 x 1	8	1	281	1400	0.16	2030050201	TUM-8x1-L6-W5/07-S02-AP
8 x 1.5	8	1.5	421	2191	0.24	2030050202	TUM-8x1.5-L6-W5/07-S02-AP
8 x 2	8	2	594	3000	0.30	2030050203	TUM-8x2-L6-W5/07-S02-AP
10 x 1	10	1	238	1098	0.23	2030050204	TUM-10x1-L6-W5/07-S02-AP
10 x 1.5	10	1.5	356	1711	0.32	2030050205	TUM-10x1.5-L6-W5/07-S02-AP
12 x 1	12	1	198	902	0.28	2030050206	TUM-12x1-L6-W5/07-S02-AP
12 x 1.5	12	1.5	297	1400	0.39	2030050207	TUM-12x1.5-L6-W5/07-S02-AP
12 x 2	12	2	396	1923	0.50	2030050208	TUM-12x2-L6-W5/07-S02-AP
14 x 2	14	2	339	1622	0.60	2030050210	TUM-14x2-L6-W5/07-S02-AP
15 x 1.5	15	1.5	238	1098	0.51	2030050211	TUM-15x1.5-L6-W5/07-S02-AP
16 x 1.5	16	1.5	223	1024	0.55	2030050212	TUM-16x1.5-L6-W5/07-S02-AP
16 x 2	16	2	297	1400	0.70	2030050213	TUM-16x2-L6-W5/07-S02-AP
16 x 2.5	16	2.5	371	1790	0.85	2030050214	TUM-16x2.5-L6-W5/07-S02-AP
18 x 1.5	18	1.5	198	902	0.62	2030050215	TUM-18x1.5-L6-W5/07-S02-AP
20 x 2	20	2	238	1098	0.90	2030050216	TUM-20x2-L6-W5/07-S02-AP
20 x 2.5	20	2.5	297	1400	1.10	2030050217	TUM-20x2.5-L6-W5/07-S02-AP
22 x 2	22	2	216	990	1.00	2030050219	TUM-22x2-L6-W5/07-S02-AP
25 x 2.5	25	2.5	238	1098	1.41	2030050221	TUM-25x2.5-L6-W5/07-S02-AP
25 x 3	25	3	285	1339	1.64	2030050222	TUM-25x3-L6-W5/07-S02-AP
28 x 2	28	2	170	765	1.30	2030050223	TUM-28x2-L6-W5/07-S02-AP
30 x 3	30	3	238	1098	2.03	2030050225	TUM-30x3-L6-W5/07-S02-AP
30 x 4	30	4	317	1503	2.60	2030050226	TUM-30x4-L6-W5/07-S02-AP
35 x 2	35	2	136	604	1.65	6100053745	TUM-35x2-L6-W5/07-S02-AP
35 x 3	35	3	252	825	2.41	6100232279	TUM-35x3-L6-W5/7-S02-AP
38 x 3	38	3	188	851	2.98	6100053744	TUM-38x3-L6-W5/07-S02-AP
38 x 5	38	5	313	1481	4.13	2030050234	TUM-38x5-L6-W5/07-S02-AP
42 x 3	42	3	170	765	2.93	2030050236	TUM-42x3-L6-W5/07-S02-AP

Standard length 6000 mm (6 m) sold as lengths

Weight unit is kilogram per metre

Specification – Stainless Steel Tube Matt Finish

Material : Austenitic stainless steel 316/316L

Technical standards: ASTM A213AW/A269

Condition: Cold drawn seamless

Delivery Condition: plugged or capped

Working pressures: calculated for straight lengths at 50° C.

Order Codes

TUM-6x1*-L6*-W5/07*-S02*-AP


* Tubing - OD Metric	TUM	* Material	Stainless Steel	-W5/07
* Outside Tube Diameter - D (in mm)	-6	* Tube Standard	EN 10216-5:2013	-S02
* Wall Thickness - WT (in mm)	x1	* Tube Finish	Annealed and Pickled	-AP
* Length	6 metre	-L6		

Please note: Tubing should be cut according to the relevant fitting manufacturer's assembly instructions.
For the cutting of tube, STAUFF recommends the use of a Cold saw or Band saw cutting device.

DISCLAIMER: Pressures are calculated for straight tube according to AS4041 for dynamic stress for the carbon steel tube and to AS4041 for static stress for the stainless steel tube and are given as a guide only. Bends may introduce wall thinning with consequent reduction in the allowable pressure. All critical applications should be subject to proving tests. No allowance has been made for corrosion in the calculations. Thin walled tubing will need support sleeves for secure "bite" type and "compression" type fitting assembly. Tube is generally available ex-stock, subject to prior sale. Minimum mill quantities may apply to certain sizes.



Tube - Imperial Type TUI - Stainless Steel - Annealed & Pickled



Size	Tube OD (mm/inches) D		Wall Thickness (mm) WT	Working Pressure (bar)	Burst Pressure (bar)	Weight (kg/m)	Item No.	Designation
6.35 x 0.89	6.35	1/4	0.89	333	1588	0.12	2030050312	TUI-6.35x0.89-L6-W5/07-S02-AP
6.35 x 1.24	6.35	1/4	1.24	464	2292	0.17	2030050314	TUI-6.35x1.24-L6-W5/07-S02-AP
9.53 x 0.89	9.53	3/8	0.89	222	1019	0.19	2030050318	TUI-9.53x0.89-L6-W5/07-S02-AP
9.53 x 1.24	9.53	3/8	1.24	309	1463	0.26	2030050320	TUI-9.53x1.24-L6-W5/07-S02-AP
9.53 x 1.65	9.53	3/8	1.65	411	2161	0.33	2030050325	TUI-9.53x1.65-L6-W5/07-S02-AP
12.7 x 0.89	12.7	1/2	0.89	166	749	0.27	2030050327	TUI-12.7x0.89-L6-W5/07-S02-AP
12.7 x 1.24	12.7	1/2	1.24	232	1145	0.36	2030050329	TUI-12.7x1.24-L6-W5/07-S02-AP
12.7 x 1.65	12.7	1/2	1.65	309	1461	0.46	2030050331	TUI-12.7x1.65-L6-W5/07-S02-AP
15.88 x 1.24	15.88	5/8	1.24	186	841	0.45	2030050335	TUI-15.88x1.24-L6-W5/07-S02-AP
15.88 x 1.65	15.88	5/8	1.65	247	1144	0.59	2030050338	TUI-15.88x1.65-L6-W5/07-S02-AP
19.05 x 1.24	19.05	3/4	1.24	155	403	0.55	2030050339	TUI-19.05x1.24-L6-W5/07-S02-AP
19.05 x 1.65	19.05	3/4	1.65	206	940	0.72	2030050341	TUI-19.05x1.65-L6-W5/07-S02-AP
19.05 x 2.11	19.05	3/4	2.11	263	1227	0.90	2030050343	TUI-19.05x2.11-L6-W5/07-S02-AP
19.05 x 3.25	19.05	3/4	3.25	405	1973	1.30	2030050344	TUI-19.05x3.25-L6-W5/07-S02-AP
25.4 x 1.65	25.4	1	1.65	154	691	0.98	2030050346	TUI-25.4x1.65-L6-W5/07-S02-AP
25.4 x 2.11	25.4	1	2.11	225	1037	1.23	2030050348	TUI-25.4x2.11-L6-W5/07-S02-AP
31.75 x 1.65	31.75	1-1/4	1.65	122	539	1.39	2030050350	TUI-31.75x1.65-L6-W5/07-S02-AP
31.75 x 3.05	31.75	1-1/4	3.05	228	1049	2.17	2030050351	TUI-31.75x3.05-L6-W5/07-S02-AP
31.75 x 3.25	31.75	1-1/4	3.25	262	1124	3.54	2030050352	TUI-31.75x3.25-L6-W5/07-S02-AP

Standard length 6000 mm (6 m) sold as lengths

Weight unit is kilogram per metre

Specification – Stainless Steel Tube Matt Finish

Material : Austenitic stainless steel 316/316L

Technical standards: ASTM A213AW/A269

Condition: Cold drawn seamless

Delivery Condition: plugged or capped

Working pressures: calculated for straight lengths at 50° C.

Order Codes

TUI-6.35x0.89*-L6*-W5/07*-S02*-AP

* Tubing - OD Imperial	TUI	* Material	Stainless Steel	-W5/07
* Outside Tube Diameter - D (in mm)	-6.35	* Tube Standard	EN 10216-5:2013	-S02
* Wall Thickness - WT (in mm)	x0.89	* Tube Finish	Annealed and Pickled	-AP
* Length	6 metre			-L6


Please note: Tubing should be cut according to the relevant fitting manufacturer's assembly instructions.
For the cutting of tube, STAUFF recommends the use of a Cold saw or Band saw cutting device.

DISCLAIMER: Pressures are calculated for straight tube according to AS4041 for dynamic stress for the carbon steel tube and to AS4041 for static stress for the stainless steel tube and are given as a guide only. Bends may introduce wall thinning with consequent reduction in the allowable pressure. All critical applications should be subject to proving tests. No allowance has been made for corrosion in the calculations. Thin walled tubing will need support sleeves for secure "bite" type and "compression" type fitting assembly. Tube is generally available ex-stock, subject to prior sale. Minimum mill quantities may apply to certain sizes.



Tube - Metric

Type TUM - Stainless Steel - Bright Annealed



Size	Tube OD (mm) D	Wall Thickness (mm) WT	Working Pressure (bar)	Burst Pressure (bar)	Weight (kg/m)	Item No.	Designation
6 x 1	6	1	374	1923	0.13	2030001600	TUM-6x1-L6-W5/07-S02-BA
6 x 1.5	6	1.5	561	3000	0.17	2030001599	TUM-6x1.5-L6-W5/07-S02-BA
8 x 1	8	1	281	1400	0.18	2030001602	TUM-8x1-L6-W5/07-S02-BA
8 x 1.5	8	1.5	421	2191	0.24	2030001601	TUM-8x1.5-L6-W5/07-S02-BA
8 x 2	8	2	594	3000	0.30	6100152406	TUM-8x2-L6-W5/07-S02-BA
10 x 1	10	1	238	1098	0.23	2030001604	TUM-10x1-L6-W5/07-S02-BA
10 x 1.5	10	1.5	356	1711	0.32	2030001603	TUM-10x1.5-L6-W5/07-S02-BA
12 x 1	12	1	198	902	0.28	2030001607	TUM-12x1-L6-W5/07-S02-BA
12 x 1.5	12	1.5	297	1400	0.39	2030001606	TUM-12x1.5-L6-W5/07-S02-BA
12 x 2	12	2	396	1923	0.50	2030001608	TUM-12x2-L6-W5/07-S02-BA
14 x 2	14	2	339	1622	0.60	6100296202	TUM-14x2-L6-W5/07-S02-BA
15 x 1.5	15	1.5	238	1098	0.51	2030001609	TUM-15x1.5-L6-W5/07-S02-BA
16 x 1.5	16	1.5	223	1024	0.55	2030001610	TUM-16x1.5-L6-W5/07-S02-BA
16 x 2	16	2	297	1400	0.70	2030001612	TUM-16x2-L6-W5/07-S02-BA
16 x 2.5	16	2.5	371	1790	0.85	2030001614	TUM-18x1.5-L6-W5/07-S02-BA
18 x 1.5	18	1.5	198	902	0.62	2030001615	TUM-18x2-L6-W5/07-S02-BA
18 x 2	18	2	264	1231	0.80	6100296203	TUM-20x2-L6-W5/07-S02-BA
20 x 2	20	2	238	1098	0.90	2030001616	TUM-20x2.5-L6-W5/07-S02-BA
20 x 2.5	20	2.5	297	1400	1.10	2030001621	TUM-22x2-L6-W5/07-S02-BA
22 x 2	22	2	216	990	1.00	2030001625	TUM-25x2-L6-W5/07-S02-BA
25 x 2.5	25	2.5	238	1098	1.41	2030001623	TUM-25x2.5-L6-W5/07-S02-BA
25 x 3	25	3	285	1339	1.64	6100296204	TUM-25x3-L6-W5/07-S02-BA
28 x 2	28	2	170	765	1.30	6100296205	TUM-28x2-L6-W5/07-S02-BA
30 x 3	30	3	238	1098	2.03	2030001632	TUM-30x4-L6-W5/07-S02-BA
30 x 4	30	4	317	1503	2.61	2030001634	TUM-35x2-L6-W5/07-S02-BA
35 x 2	35	2	136	604	1.65	2030001635	TUM-35x3-L6-W5/07-S02-BA
35 x 3	35	3	204	929	2.50	2030001636	TUM-38x3-L6-W5/07-S02-BA
38 x 3	38	3	188	851	2.98	2030001637	TUM-38x4-L6-W5/07-S02-BA
38 x 5	38	5	313	1481	4.13	6100297576	TUM-38x5-L6-W5/07-S02-BA
42 x 3	42	3	170	765	2.93	2030001642	TUM-42x3-L6-W5/07-S02-BA

Standard length 6000 mm (6 m) sold as lengths

Weight unit is kilogram per metre

Specification – Stainless Steel Tube Bright Annealed

Material : Austenitic stainless steel 316/316L

Technical standards: ASTM A213AW/A269

Condition: Cold drawn seamless

Delivery Condition: plugged or capped

Working pressures: calculated for straight lengths at 50° C.

Please note: Tubing should be cut according to the relevant fitting manufacturer's assembly instructions.
For the cutting of tube, STAUFF recommends the use of a Cold saw or Band saw cutting device.

Order Codes

***TUM*-6x1*-L6*-W5/07*-S02*-BA**


* Tubing - OD Metric	TUM	* Material	Stainless Steel	-W5/07
* Outside Tube Diameter - D (in mm)	-6	* Tube Standard	EN 10216-5:2013	-S02
* Wall Thickness - WT (in mm)	x1	* Tube Finish	Bright Annealed	-BA
* Length	6 metre			-L6

DISCLAIMER: Pressures are calculated for straight tube according to AS4041 for dynamic stress for the carbon steel tube and to AS4041 for static stress for the stainless steel tube and are given as a guide only. Bends may introduce wall thinning with consequent reduction in the allowable pressure. All critical applications should be subject to proving tests. No allowance has been made for corrosion in the calculations. Thin walled tubing will need support sleeves for secure "bite" type and "compression" type fitting assembly.

Tube is generally available ex-stock, subject to prior sale. Minimum mill quantities may apply to certain sizes.



Tube - Imperial Type TUI - Stainless Steel - Bright Annealed



Size	Tube OD (mm/inches) D	Wall Thickness (mm) WT	Working Pressure (bar)	Burst Pressure (bar)	Weight (kg/m)	Item No.	Designation
3.18 x 0.89	3.18	1/8	0.89	664	0.05	6100279867	TUI-3.18x0.89-L6-W5/07-S02-BA
4.76 x 0.89	4.76	3/16	0.89	445	0.09	6100296195	TUI-4.76x0.89-L6-W5/07-S02-BA
6.35 x 0.89	6.35	1/4	0.89	333	0.12	6100296196	TUI-6.35x0.89-L6-W5/07-S02-BA
6.35 x 1.24	6.35	1/4	1.24	464	0.17	6100296197	TUI-6.35x1.24-L6-W5/07-S02-BA
6.35 x 1.65	6.35	1/4	1.65	617	0.18	6100296198	TUI-6.35x1.65-L6-W5/07-S02-BA
9.53 x 0.89	9.53	3/8	0.89	222	0.19	6100296199	TUI-9.53x0.89-L6-W5/07-S02-BA
9.53 x 1.24	9.53	3/8	1.24	309	0.26	6100296200	TUI-9.53x1.24-L6-W5/07-S02-BA
9.53 x 1.65	9.53	3/8	1.65	411	0.33	6100296201	TUI-9.53x1.65-L6-W5/07-S02-BA
12.7 x 0.89	12.7	1/2	0.89	166	0.27	6100296181	TUI-12.7x0.89-L6-W5/07-S02-BA
12.7 x 1.24	12.7	1/2	1.24	232	0.36	6100296182	TUI-12.7x1.24-L6-W5/07-S02-BA
12.7 x 1.65	12.7	1/2	1.65	309	0.46	6100260437	TUI-12.7x1.65-L6-W5/07-S02-BA
12.7 x 2.11	12.7	1/2	2.11	395	0.56	6100296183	TUI-12.7x2.11-L6-W5/07-S02-BA
15.88 x 1.24	15.88	5/8	1.24	186	0.45	6100296184	TUI-15.88x1.24-L6-W5/07-S02-BA
15.88 x 1.65	15.88	5/8	1.65	247	0.59	6100296185	TUI-15.88x1.65-L6-W5/07-S02-BA
19.05 x 1.24	19.05	3/4	1.24	155	0.55	6100296188	TUI-19.05x1.24-L6-W5/07-S02-BA
19.05 x 1.65	19.05	3/4	1.65	206	0.72	6100296186	TUI-19.05x1.65-L6-W5/07-S02-BA
19.05 x 2.11	19.05	3/4	2.11	263	0.90	6100296190	TUI-19.05x2.11-L6-W5/07-S02-BA
25.4 x 1.24	25.4	1	1.24	116	0.90	6100296191	TUI-25.4x1.24-L6-W5/07-S02-BA
25.4 x 1.65	25.4	1	1.65	154	0.98	6100296192	TUI-25.4x1.65-L6-W5/07-S02-BA
25.4 x 2.11	25.4	1	2.11	225	1.23	6100296193	TUI-25.4x2.11-L6-W5/07-S02-BA
25.4 x 3.25	25.4	1	3.25	304	1.77	6100296194	TUI-25.4x3.25-L6-W5/07-S02-BA
31.75 x 3.25	31.75	1 1/4	3.25	262	2.26	2030001593	TUI-31.75x3.25-L6-W5/07-S02-BA

Standard length 6000 mm (6 m) sold as lengths

Weight unit is kilogram per metre

Specification – Stainless Steel Tube Bright Annealed

Material : Austenitic stainless steel 316/316L

Technical standards: ASTM A213AW/A269

Condition: Cold drawn seamless

Delivery Condition: plugged or capped

Working pressures: calculated for straight lengths at 50° C.

Order Codes

TUI-6.35x0.89*-L6*-W5/07*-S02*-BA

* Tubing - OD Imperial	TUI	* Material	Stainless Steel	-W5/07
* Outside Tube Diameter - D (in mm)	-6.35	* Tube Standard	EN 10216-5:2013	-S02
* Wall Thickness - WT (in mm)	x0.89	* Tube Finish	Bright Annealed	-BA
* Length	6 metre			-L6

Please note: Tubing should be cut according to the relevant fitting manufacturer's assembly instructions. For the cutting of tube, STAUFF recommends the use of a Cold saw or Band saw cutting device.

DISCLAIMER: Pressures are calculated for straight tube according to AS4041 for dynamic stress for the carbon steel tube and to AS4041 for static stress for the stainless steel tube and are given as a guide only. Bends may introduce wall thinning with consequent reduction in the allowable pressure. All critical applications should be subject to proving tests. No allowance has been made for corrosion in the calculations. Thin walled tubing will need support sleeves for secure "bite" type and "compression" type fitting assembly. Tube is generally available ex-stock, subject to prior sale. Minimum mill quantities may apply to certain sizes.



Introduction


STAUFF Tube - Steel

STAUFF Tube - Stainless Steel



Catalogue 2.4

STAUFF Tube

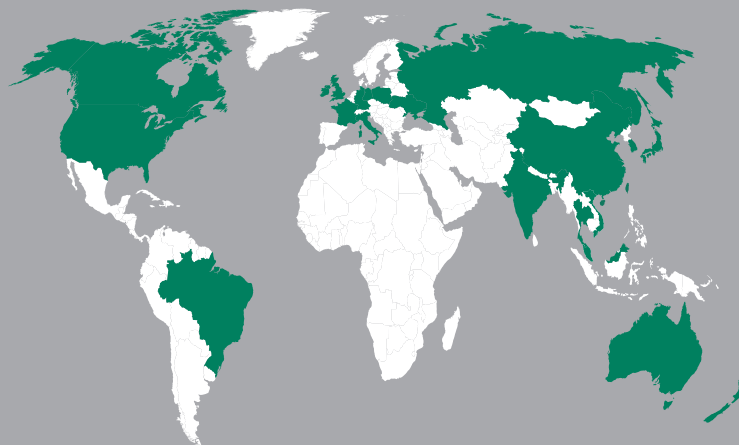

Germany

Walter Stauffenberg GmbH & Co. KG
Im Ehrenfeld 4
58791 Werdohl
Tel.: +49 2392 91 60
Fax: +49 2392 91 61 03
E-Mail: sales@stauff.com

STAUFF products and services are globally available through wholly-owned subsidiaries and a tight network of authorised distributors and representatives in all major industrial regions of the world.

www.stauff.com

Australia and New Zealand

Adelaide

SA Australia
E: sant.sales@stauff.com.au

Auckland

New Zealand
E: sales@stauff.co.nz

Brisbane

QLD Australia
E: qld.sales@stauff.com.au

Melbourne

VIC Australia
E: vic.sales@stauff.com.au

Sydney

NSW Australia
E: nsw.sales@stauff.com.au

Wollongong

NSW Australia
E: una.sales@stauff.com.au